

Upper part 110x30 mm - anodised in brass-colour




DIN 16 181 B, B1

DIN 16 182 S, S1

Order example	VA	2	35	1	1	030	2	1
Thermometer version								
straight	VA							
angle 90°	HA							
angle 135°	SA							
Immersion tube type								
		2						
Measuring ranges								
		-30 + 50°C	=35					
		0 + 60°C	=06					
		0 + 100°C	=10					
		0 + 120°C	=12					
		0 + 160°C	=16					
		0 + 200°C	=20					
Division								
		Celsius (°C)		1				
		Celsius + Fahrenheit (°C + F)		2				
Thermometrical liquid filling								
		blue filling standard for measuring ranges up to +200°C		Fü=1				
		option: mercury		Hg=2				
Immersion tube length measure l ₁ in mm								
			30 = 030					
			40 = 040					
			63 = 063					
			100 = 100					
			160 = 160					
			250 = 250					
			400 = 400					
Thread								
			G 3/8 A / SW 22	1				
			G 1/2 A / SW 27	2				
			M 16x1.5 / SW 22	5				
			M 20x1.5 / SW 27	7				
Immersion tube materials: brass (hexagon Ms 58/tube SoMs 76 or Ms 63), brazed, resp. to immersion tube length l ₁ =63, G½A made of Ms 58 solid possible at our own choice.								
				1				
			Steel (hexagon 9SMnPb28K/tube St 35, welded)	2				
			Steel 1.4571 (hexagon and tube)	3				
			Special brass (hexagon SoMs59/tube SoMs 76)	4				
			CuNi30Fe (hexagon and tube)	5				

The immersion tube is connected by a groove connection to the upper part at all angular thermometers <90°. This connection is secured by a hardened retaining screw.

Advantage: Simple installation, immersion tube and upper part can be installed separately. No turning of the upper part required for installation.

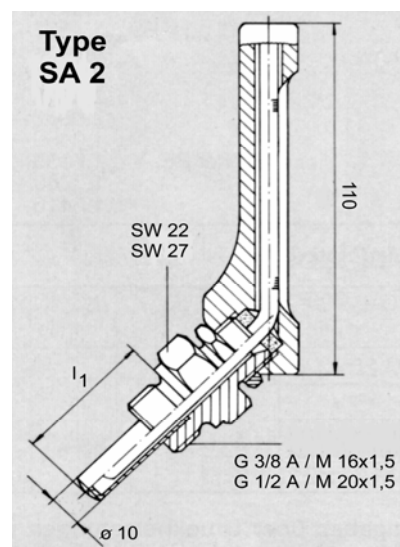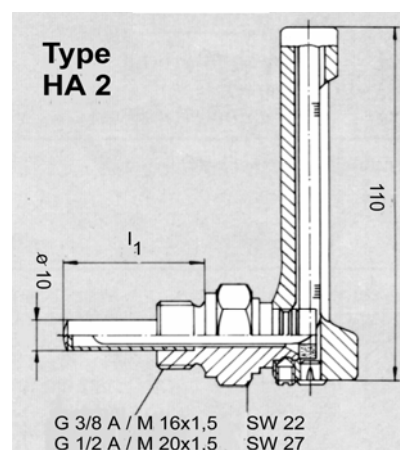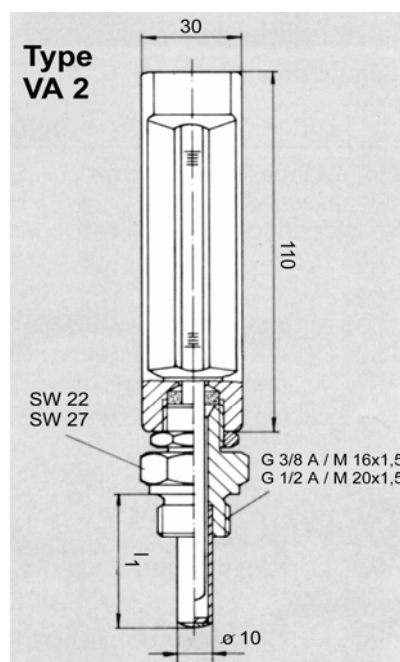

Sales and Export South, West, North

ARMATURENBAU GmbH

Manometerstraße 5 • D-46487 Wesel - Ginderich
Tel.: +49 (0) 28 03 / 91 30-0 • Fax: +49 (0) 28 03 / 10 35
armaturenbau.com • mail@armaturenbau.com



Subsidiary Company, Sales and Export East

MANOTHERM Beierfeld GmbH

Am Gewerbepark 9 • D-08344 Grünhain-Beierfeld
Tel.: +49 (0) 37 74 / 58-0 • Fax: +49 (0) 37 74 / 58-545
manotherm.com • mail@manotherm.com

